


Product Code

**1098/9S**

Solenoid Valve  
1.1/8" ODS w/o Coil

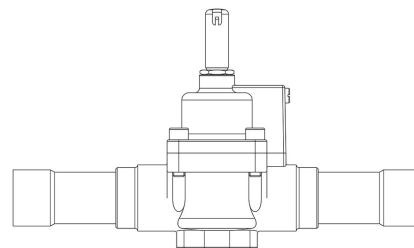

CLASSIC

## Impiego

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

- HCFC (R22)
- HFC (R134a, R404A, R407C, R410A, or R507)
- HFO and HFO/HFC blends (R1234ze, R448A, R449A, R450A, R452A, R513A)

Maximum allowable pressure PS = 45 bar.

Allowable temperatures TS = -35 / +105 °C (+110 °C for direct opening).

These valves are sold in both the version without the coil (S suffix) and the version with the coil (A6 suffix for coils at 220 VAC and A7 suffix for coils at 240 VAC).

## Dettagli prodotto

<b>Operating principle</b>	Piston pilot operated
<b>Coil Type (1)</b>	HF2HF3HF4HM2HM3HM4CM2
<b>Connections ODS Ø [in.]</b>	1.1/8"
<b>Connections ODS Ø [mm]</b>	-
<b>Kv [m³/h]</b>	10
<b>PS [bar]</b>	45
<b>TS [°C] Min</b>	-35
<b>TS [°C] Max</b>	+110
<b>Package Pcs.</b>	1

## Note dove espressamente riportate

(1) : coils that can be mounted on the valves