

AC axial fans - HyBlade®

Ø 560




- **Material:** Guard grille: Steel, phosphated and coated in black plastic
Wall ring: Sheet steel, pre-galvanised and coated in black plastic
Blades: Insertion part made of sheet aluminium, extrusion-coated in PP plastics
Rotor: Encased in aluminium
- **Number of blades:** 5
- **Direction of rotation:** counter-clockwise, seen on rotor
- **Type of protection:** IP 54 (acc. to EN 60529)
- **Insulation class:** "F"
- **Mounting position:** Shaft horizontal or rotor on bottom; rotor on top on request
- **Condensate discharge holes:** Rotor-side
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Motor protection:** Design with thermal overload protector

Nominal data		Blade angle	Curve	Nominal voltage	Frequency	Speed/rpm ⁽¹⁾	Max. power input ⁽¹⁾	Max. current draw ⁽¹⁾	Capacitor	Max. operative range	Perm. amb. temp.	Electr. connection
Type	Motor			VAC	Hz	rpm	kW	A	µF/VDB	Pa	°C	p. 34
*4D 560	M4D 110-GF	0°	(A) 3~400 Δ	50	1220	1,16	1,95	—	140	-40..+50	F1b)/F2b)	
			(B) 3~400 Y	50	870	0,65	1,10	—	72	-40..+50		
*6D 560	M6D 110-EF	0°	(C) 3~400 Δ	50	870	0,45	0,88	—	75	-40..+65	F1b)/F2b)	
			(D) 3~400 Y	50	660	0,28	0,48	—	43	-40..+65		
*4E 560	M4E 110-IA	-5°	(E) 1~230	50	1275	1,09	4,76	20,0/450	160	-40..+55	A2b)	
*6E 560	M6E 110-EF	-5°	(F) 1~230	50	895	0,41	1,80	10,0/400	85	-40..+65	A2b)	

subject to alterations (1) Nominal data in operating point 3 with maximum load

Curves

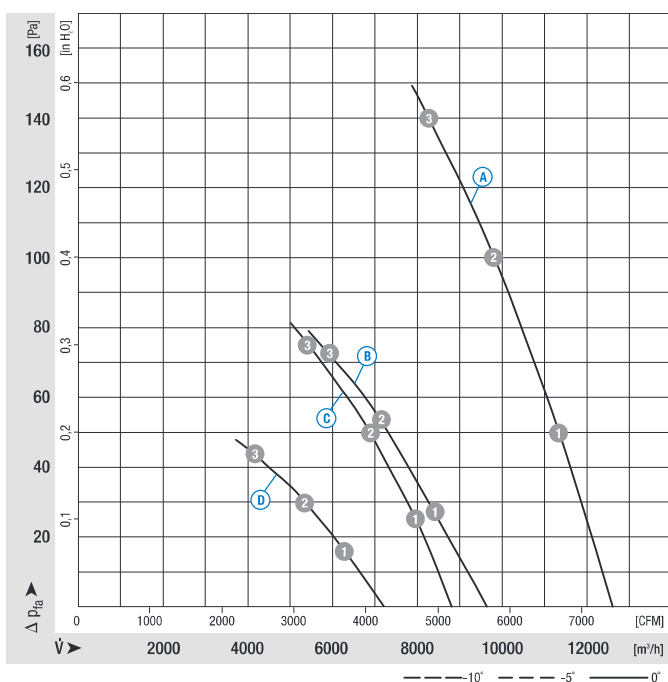

Air performance measured as per: ISO 5801, Installation category A, in ebm-papst full nozzle and without protection against accidental contact

Suction-side noise levels: L_{wA} as per ISO 13347, L_p measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!


For detailed information see page 36 ff.

	n [rpm]	P_1 [kW]	I [A]	L_{wA} [dB(A)]
(A) 1	1270	1,03	1,78	73
(A) 2	1250	1,09	1,87	72
(A) 3	1220	1,16	1,95	77
(B) 1	930	0,62	1,03	65
(B) 2	900	0,64	1,06	65
(B) 3	870	0,65	1,10	67
(C) 1	895	0,39	0,81	65
(C) 2	880	0,42	0,83	65
(C) 3	870	0,45	0,88	69
(D) 1	700	0,26	0,44	58
(D) 2	680	0,27	0,46	59
(D) 3	660	0,28	0,48	61

- **Cable exit:** Via terminal box
- **Protection class:** I (acc. to EN 61800-5-1)
- **Product conforming to standard:** CE
- **Approvals:** VDE (acc. to EN 60034)

Direction of air flow	Direction of air flow "V" on request		
	Without attachments	With full square nozzle	With guard grille for short nozzle
"V"	A4D 560-AM03 -01	W4D 560-GM03 -01	S4D 560-AM03 -01
"V"	A6D 560-AJ03 -01	W6D 560-GJ03 -01	S6D 560-AJ03 -01
"V"	A4E 560-AQ01 -01	W4E 560-GQ01 -01	S4E 560-AQ01 -01
"V"	A6E 560-AK01 -01	W6E 560-GK01 -01	S6E 560-AK01 -01

Curves

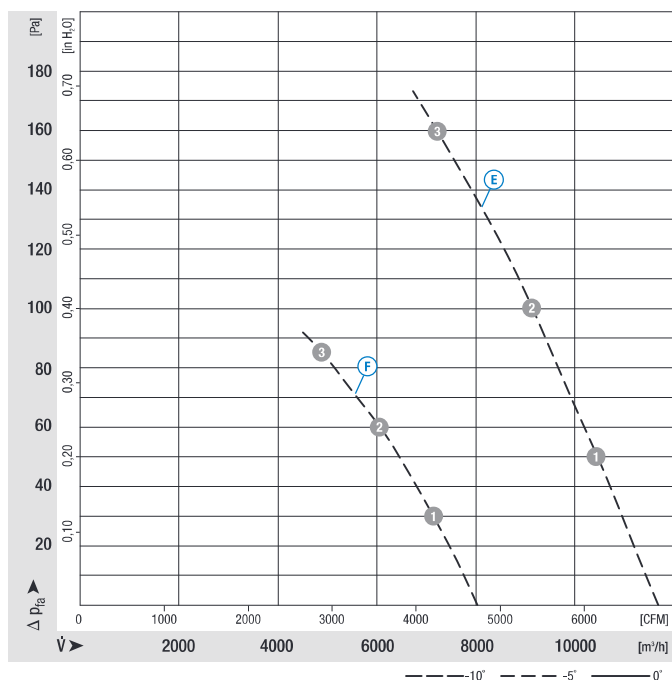

Air performance measured as per: ISO 5801, Installation category A, in ebm-papst full nozzle and without protection against accidental contact

Suction-side noise levels: L_{wA} as per ISO 13347, L_{pA} measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and re-reviewed once installed or fitted!

For detailed information see page 36 ff.

	n [rpm]	P_1 [kW]	I [A]	L_{wA} [dB(A)]
E 1	1340	0,95	4,15	75
E 2	1315	1,02	4,44	73
E 3	1275	1,09	4,76	76
F 1	920	0,36	1,60	65
F 2	910	0,39	1,72	65
F 3	895	0,41	1,80	68