


FLOW RATE CURVE :

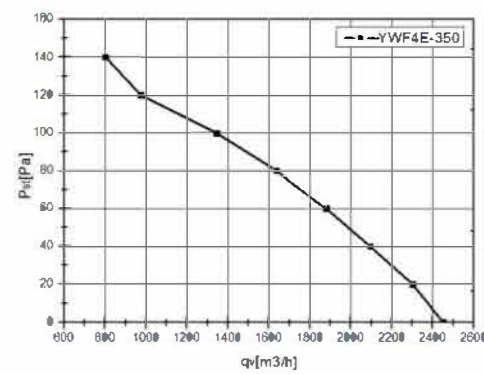


ErP2015 LABEL:  
 ErP2015 (N40)  
 N=41.23  $\eta_{statA}$ = 29.3%  
 RW4-350 230V PUHALTAVA

LABEL :

**REEPOWER** Axial Fan Motor  
 RW4-350 230V PUHALTAVA  
 230V 50Hz 0.65A 69/129W 1420r/min  
 4  $\mu$  F/450V CL.B XX/XX

WIRING DIAGRAM :

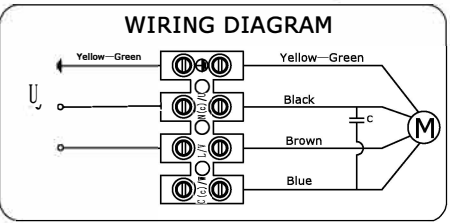

UNIT	Axial fan motor
MOTOR	Single phase motor with capacitor
MOTOR TYPE	RW4-350 230V PUHALTAVA
VOLTAGE (V)	230
FREQUENCY (Hz)	50
INPUT POWER (W)	129
CURRENT (A)	0.65
SPEED (r/min)	1420
AIR FLOW (m³/h)	2300
NOISE (dBA)	64
CAPACITOR ( $\mu$ F/450V)	4
ROTATION	CCW ,looking into the end-shield
INSULATION CLASS	B
MOTOR PROTECTION	Thermocontact 135±5°C
TEMPERATURE RISE	75K max
PROTECTION CLASS	IP54
OPERATING TYPE	S1
AMBIENT TEMPERATURE	-30°C +60°C
BEARINGS	Ball bearings
MOUNTING TYPE	Horizontal or Vertical
ELECTRICAL CONNECTION	Lead wire Silikon 4G 0.50mm $\pm$ ,Length 100mm in terminal box connected (40.5mm $\times$ 100mm)
APPROVALS	CCC, CE
NET WEIGHT/GROSS WEIGHT	5.0/6.0kg
PACKING	38.5*38.5*19cm

						SIGN	DATE	TITLE
						DRN. BY		RW4-350 230V PUHALTAVA
						CHD. BY		
						ENG. BY		PROJECTION  A4
						APP. BY		
REV.	DESCRIPTION	APPROVED	DATE					SHEET: of