



FLOW RATE CURVE :

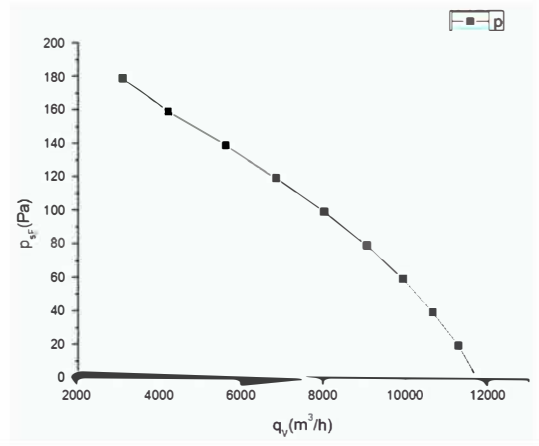

LABEL:

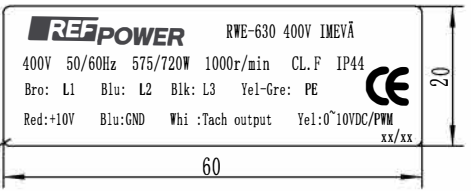

UNIT	EC Axial fan motor
MOTOR	Three phases EC motor
MOTOR TYPE	RWE-630 400V IMEVÄ
VOLTAGE (V)	400
FREQUENCY (Hz)	50/60
INPUT POWER (W)	720
CURRENT (A)	1.5
SPEED (r/min)	1000
AIR FLOW (m³/h)	11600
NOISE (dBA)	71
ROTATION	CCW, seen on rotor of motor
INSULATION CLASS	F
MOTOR PROTECTION	Undervoltage protection Overvoltage protection Overcurrent protection Locked rotor protection Automatic restart capability Soft start
PROTECTION CLASS	IP44
OPERATING TYPE	S1
AMBIENT TEMPERATURE	-25° C +60° C
BEARINGS	Bali bearings
MOUNTING TYPE	Horizontal or Vertical
NET WEIGHT/GROSS WEIGHT	15.8/17kg
PACKING	67x67x20 cm

REV.	DESCRIPTION	APPROVED	DATE	DRN. BY	SIGN	DATE	TITLE	
				CHD. BY			RWE-630 400V IMEVÄ	
				ENG. BY				
				APP. BY				
							PROJECTION	A4
								SCALE
								SHEET: of