



LABEL :

**REPPOWER** Axial Fan Motor  
**RW4-330 230V IMEVÄ**  
 230V 50Hz 0.50A 48/100W 1380r/min  
 4  $\mu$  F/450V CL.B XX/XX CE

WIRING DIAGRAM:

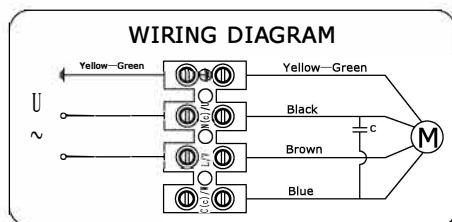

FLOW RATE CURVE:

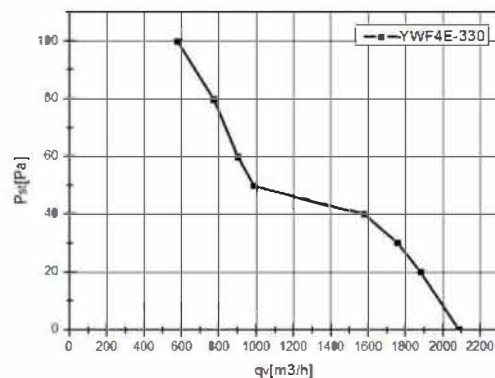

UNIT	Axial fan motor
MOTOR	Single phase motor with capacitor
MOTOR TYPE	RW4-330 230V IMEVÄ
VOLTAGE (V)	230
FREQUENCY (Hz)	50
INPUT POWER (W)	100
CURRENT (A)	0.50
SPEED (r/min)	1380
AIR FLOW 20Pa (m <sup>3</sup> /h)	1879
NOISE (dBA)	61
CAPACITOR ( $\mu$ F/450V)	4
ROTATION	CW ,looking into the end-shield
INSULATION CLASS	B
MOTOR PROTECTION	Thermocontact 135 $\pm$ 5 $^{\circ}$ C
TEMPERATURE RISE	75K max
PROTECTION CLASS	IP54
OPERATING TYPE	S1
AMBIENT TEMPERATURE	-30 $^{\circ}$ C +60 $^{\circ}$ C
BEARINGS	Ball bearings
MOUNTING TYPE	Horizontal or Vertical
ELECTRICAL CONNECTION	Lead wire Silikon 4G 0.50mm <sup>2</sup> ,Length 100mm in terminal box connected
APPROVALS	CE
NET WEIGHT/GROSS WEIGHT	3.5/4.5kg
PACKING	37*37*18cm

							SIGN	DATE	TITLE <b>RW4-330 230V IMEVÄ</b>
							DRN. BY		
							CHD. BY		
							ENG. BY		
							APP. BY		
REV.	DESCRIPTION	APPROVED	DATE						PROJECTION
									A4 SCALE SHEET: of